


SUMMARY CATALOGUE

VENTILATION SOLUTIONS



GENERAL TABLE OF CONTENTS

HATCH FANS



IN-LINE DUCT FANS



AXIAL FANS



CENTRIFUGAL FANS



SMOKE EXTRACT FANS 400 °C/2H - 300 °C/2H




PRESSURISATION SYSTEMS FOR STAIRCASES, LOBBIES AND ESCAPE ROUTES



EXPLOSIVE ATMOSPHERES ATEX FANS



FANS FOR OVENS




GENERAL TABLE OF CONTENTS


FANS FOR INDUSTRIAL APPLICATIONS



ROOF FANS



EC TECHNOLOGY AND EFFICIENT FANS



AIR TREATMENT UNITS




VENTILATION FOR HOUSES




AIR CURTAINS



HATCH FANS

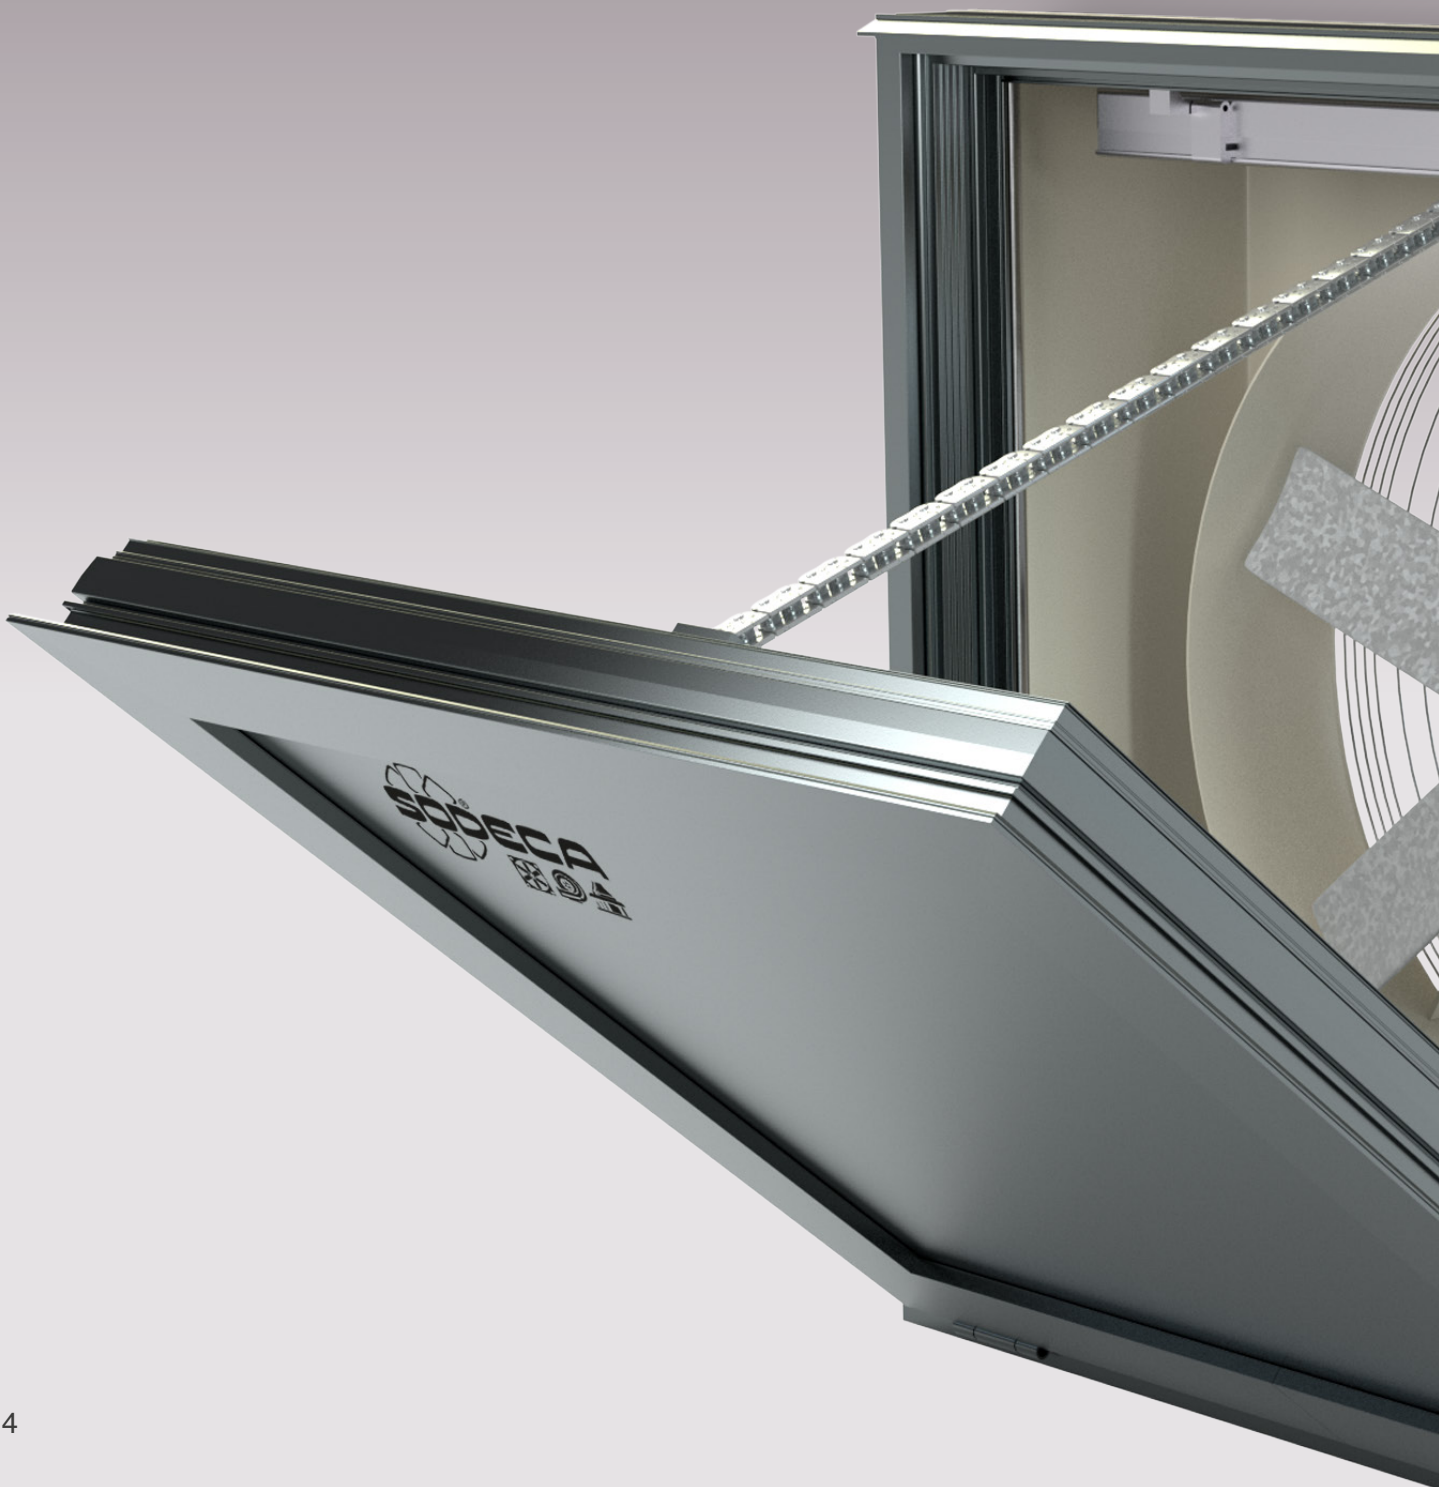



THT/WALL-F
Dynamic wall mounted extractor fans with motorised hatch, for smoke exhaust in case of fires, 400 °C/2h and 300 °C/2h



THT/WALL
Dynamic wall mounted extractor fans with motorised hatch, for smoke exhaust in case of fires, 400 °C/2h and 300 °C/2h



WALL/FREE
Dynamic wall mount extractor fans fitted with motorised hatch



WALL/DUCT
Dynamic wall mount extractor fans fitted with motorised hatch



WALL/AXIAL
Dynamic wall mount axial extract fans fitted with motorised hatch




THT/HATCH
400°C/2h and 300°C/2h rated dynamic discharge system with motorised opening function, fitted with roof mounted extractor, for smoke exhaust in the event of fire



HCT/HATCH
Dynamic discharge systems with motorised opening function fitted with roof-mount extract fan

IN-LINE DUCT FANS

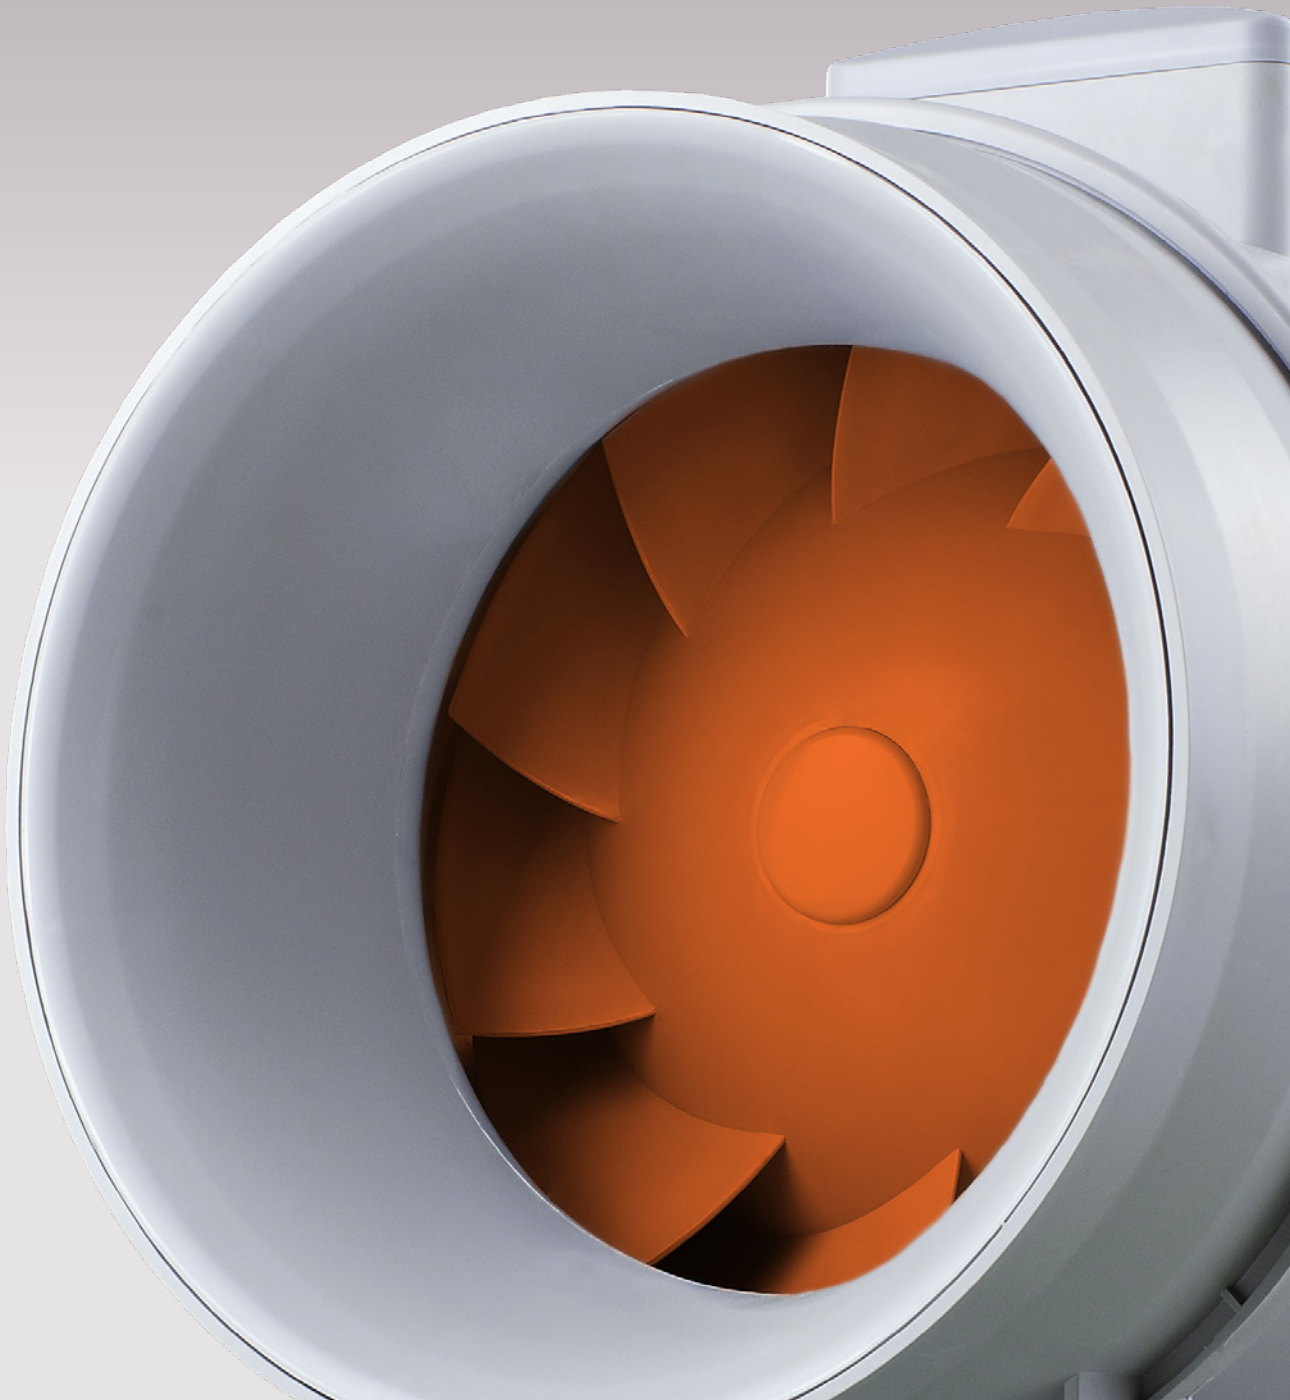



SV
Lownoise, in-line duct extractor fans mounted inside an acoustic casing



SVE
Low-noise, in-line duct extractor fans mounted inside an acoustic casing



SVE/PLUS
Low noise in-line duct extractor fans mounted inside a 40 mm phonoabsorbent acoustic insulated casing



SVE/PLUS/EW
Low noise in-line duct extractor fans mounted inside a 40 mm phonoabsorbent acoustic insulated casing



CL/PLUS/EC
In-line extract fans for rectangular ducts with a 40 mm thick acoustic casing to reduce noise and EC Technology motor



SVE/PLUS/EW/CPC
In-line duct fans, automatic operation, low noise level and constant pressure control



NEOLINEO V
In-line fans for small ducts with removable covers and small size with long life ball bearings



NEOLINEO/EW
In-line duct extractor fans with a detachable body and small size, fitted with an EC Technology motor



NEOSILENT
Low noise, in-line duct extractor fans with durable ball bearings



CA/LINE
In-line circular duct extractor fans with 3 speed motors



TUB
Small size, in-line extract fans with a detachable body, designed for installation in chimneys at up to 250 °C

AXIAL FANS



HEP

Wall mounted axial fans with IP65 motor



HEPT

Tubular axial fans with IP65 motors



HRE/EC

Circular axial fans with EC Technology outer rotor motor



WALL/FREE

Dynamic wall mount extractor fans fitted with motorised hatch



HCT/IMP-C

Long range, circular, one way or reversible jet fans



HCT/IMP

Long range, one way or reversible jet fans



HFW/EC

Hot-dip galvanized tubular axial fans, with EC Technology IE5 motor



HTP

High pressure tubular axial extract fans



HBA

Forked tubular axial fans with motors outside the airflow



HPX/SEC

Fans designed to withstand extreme working conditions in ovens, dryers and other applications with high temperature and humidity



HGT

Large diameter tubular axial fans with direct drive motors



HC

Wall mounted axial fans with IP55 motor



HC/EC

Wall mounted axial fans, with EC Technology IE5 motor



WALL/AXIAL

Dynamic wall mount axial extract fans fitted with motorised hatch



HCD

Small diameter wall mounted axial fans



HCRE/EC

Wallmounted axial fans with EC Technology external rotor motor



WALL/DUCT

Dynamic wall mount extractor fans fitted with motorised hatch



HCH

Very robust wall mounted axial fans



HCT

Extremely robust tubular axial fans



HCT/EC

Tubular axial fans, with EC Technology IE5 motor



CJHCH

Axial ventilation units with acoustically insulated box



HTM

Tubular portable axial fans



HPX

Tubular axial fans with external motors



HCH/SEC

Fans designed with the best technology and experience to withstand extreme working conditions of up to 90°C in wood and ceramic drying barns



HGI

Large diameter axial fans for farms



HFW

Hot dip galvanised tubular fans



HGT/CL

Large diameter tubular axial fans with direct drive motors



HGTX

Large diameter tubular axial fans with external motors



HCT/MAR

Extremely robust tubular axial duct extractor fans for marine and naval applications



CENTRIFUGAL FANS



CBD

Centrifugal double inlet fans with direct motor and forward curved impeller



CBD 3V

Centrifugal double inlet fans with 3 speed motor



CJBDEW

Acoustically isolated ventilation units equipped with CBD/EW fans with EC Technology motor



CJBDEW/CPC

Acoustically isolated, self-operating exhaust units, CBD/EW fans and constant pressure control



CJK/EC

Ventilation units for circular ducts, with 25 mm acoustic insulation casing, interchangeable covers and EC Technology motor



CJPFF

In-line ventilation units with high efficiency Plug Fan



CBXR

Belt driven centrifugal fans with double inlet, with reinforced structure and rigid bridge bearings supported on the structure



CBXT

Belt driven double inlet centrifugal fans with electric motor, pulleys, belts, protectors and backward impeller



CJBX

Transmission ventilation units acoustically isolated



CJBX/AL

Belt driven ventilation units with aluminium profiles and prefinished sheet steel and acoustic insulation



CJBX/ALS

Belt driven ventilation units with double insulated wall, pre-varnished sheet and aluminium profiles



CBD/EW

Centrifugal double inlet fans with direct motor and high efficiency impeller, equipped with EC Technology motor




CBD/B

Centrifugal double inlet fans with inlet flange and without support feet



CBD/B/EW

Double inlet centrifugal fans, direct motor, forward impeller, EC Technology motor, inlet flange and without support feet



PF

Plug Fan type high efficiency centrifugal fans for air treatment applications



CJBD

Ventilation units acoustically insulated



CJBD/INT

Ventilation units with built-in switch



CJBD/C

Ventilation units with circular inlet and outlet



CJBD/AL

Ventilation units with aluminum profiles and acoustically insulated pre-lacquered sheet



CJBD/EW/AL

Acoustically insulated ventilation units with aluminum profiles and pre-lacquered sheet metal, with CBD/EW fans with EC Technology motor



CJBD/ALS

Ventilation units with double insulating wall, pre-lacquered sheet metal and aluminum profiles



CJBD/F

Ventilation units with built-in filter



CJBD/ALF

Ventilation units with pre-lacquered sheet metal, built-in filter and aluminum profiles



CJV/EW

Extraction units with automatic operation, vertical air outlet, EC Technology motor and constant pressure control for homes



CBX

Belt driven centrifugal fans with double inlet, with shaft output on both sides and with a forward curved impeller



CBXC

Centrifugal fans with double inlet transmission with highly rigid cubic structure to reinforce the casing



CJBX/F

Ventilation units with built-in filter



CJBX/ALF

Belt driven ventilation units with pre-lacquered sheet, built-in filters and aluminium profiles



CDXR

Belt driven centrifugal double inlet fans with shaft output on both sides and backward curved impeller



CDXRT

Belt driven double inlet centrifugal fans with electric motor, pulleys, belts, protectors and backward impeller



CJDXR

Acoustically isolated ventilation units with backward curved impeller, equipped with CDXR series fans, on rubber bumpers

CENTRIFUGAL FANS



NEW

CJDXR/AL

Belt driven ventilation units with aluminium profiles and prefinished sheet steel and acoustic insulation



NEW

CJDXR/ALS

Belt driven ventilation units with double insulated wall, pre-varnished sheet and aluminium profiles



TSAT

Belt driven single inlet centrifugal fans, with electric motor, pulleys, belts, protectors and forward impeller



CJBR

Acoustically insulated ventilation units with sandwich panel with linear air direction between intake and discharge



F 400

D 400

CJTX-C

400°C/2h belt-driven double inlet extractor fan units



F 400

D 400

CJSRX

Extraction units 400 °C/2h to work outside the fire risk zone, driven by transmission with a backward curved impeller



EC

NEW

CPV/EC

Single inlet anti-corrosive centrifugal fans made of polypropylene, with EC Technology IE5 motor



CMA

Single inlet medium pressure centrifugal fans with cast aluminum casing and impeller



EC

NEW

CMA/EC

Single inlet medium pressure centrifugal fans, casing and impeller in cast aluminum, and EC Technology IE5 motor



CMPE

Single inlet medium pressure centrifugal fans with external rotor motor



CMP

Single inlet medium pressure centrifugal fans with sheet steel casing and impeller



NEW

CJDXR/ALF

Belt driven ventilation units with pre-lacquered sheet, built-in filters and aluminium profiles



CSXR

Belt driven centrifugal fans with single inlet, with shaft output and backward curved impeller



CSXRT

Belt driven single inlet centrifugal fans with and backward impeller, electric motor, pulleys, belts and protectors



CJSXR

Acoustically isolated with backward curved impeller ventilation units, equipped with CSXR series fans on rubber bumpers



TSA

Belt driven centrifugal fans with single inlet with shaft output and forward curved impeller



CI-CO

Long range, low profile, induction centrifugal jet fans



CICO/LP

Low profile, centrifugal induction jet fans



CKD

F400 extractor fan units with a large door for ease of maintenance and 40 mm acoustic insulation slab



CKDR

F400 extractor fan units with a large door for ease of maintenance and 40 mm acoustic insulation slab



CKDR/EC

Extraction units with large door and 40 mm acoustic insulation, equipped with EC Technology IE5 motor



CJSX

400 °C/2h belt-driven single inlet extractor fan units



CJLINE

400 °C/2h air and smoke extract fan units with linear inlets and outlets



CJLINE/EC

Air extraction units with linear inlet and outlet, equipped with EC Technology IE5 motor



CB

Single inlet centrifugal fans with forward curved impeller



CPV

Single inlet anti-corrosive centrifugal fans made of polypropylene



CMP/EC

Centrifugal fans of medium pressure and single inlet, direct motor, forward impeller and EC Technology IE5 motor



CMP/AL

Non-sparking aluminum fans for use in rooms with natural gas boilers



CJMP/AL

Non-sparking aluminum ventilation units for use in rooms with natural gas boilers



CRL

Centrifugal medium pressure single inlet fans with backward curved impeller



CRL/EC

Single inlet medium pressure centrifugal fans, backward impeller, IE5 EC Technology direct motor

CENTRIFUGAL FANS



CMR

Very robust single inlet medium pressure centrifugal fans, equipped with a backward impeller



AC

CMR/EW

Medium pressure single inlet centrifugal fans, direct motor, backward impeller and high-efficiency adjustable motor



CA

Single inlet, high pressure centrifugal fans with cast aluminum casing and impeller



CAM

Single inlet, high pressure centrifugal fans with sheet steel casing and cast aluminum impeller



CMRS

Very robust single inlet medium pressure centrifugal fans, equipped with a backward impeller



CMRS-X

Belt driven fans, equipped with an electric motor, a set of pulleys, belts and protectors standardized according to ISO-13857



CMP/MAR

Medium pressure centrifugal extractor fans fitted with forward curved impeller for marine applications



CMPI

Medium pressure centrifugal extractor fans fitted with forward curved impeller made of AISI-304 stainless steel



CBP

Medium pressure single inlet centrifugal fans, equipped with backward impeller, designed for painting booths



CBPC

Medium pressure single inlet centrifugal fans, with backward impeller, designed for painting booths, with vertical outlet



CAS

Single inlet, high pressure centrifugal fans with sheet steel casing and impeller



CAS/EW

Single inlet, high pressure centrifugal fans, sheet steel casing and impeller, and high-efficiency adjustable motor

AC



CAS-S

Single inlet, high pressure centrifugal fans with sheet steel casing and impeller, equipped with acoustic attenuator



CMP-X

Belt driven fans, equipped with electric motor, set of pulleys, belts and protectors standardized according to ISO-13857 standard



CMAT

Centrifugal fans of medium pressure and single inlet, with straight blade impeller, for the transport of dust and solid material



CMTS

Medium pressure single inlet centrifugal fans with casing and straight blade impeller, made of sheet steel, for transporting smoke with solid material



CMT

Medium pressure single inlet centrifugal fans with casing and straight blade impeller, made of sheet steel for conveying powder and solid material



PORT

Extremely robust, high power portable air extractors



CASB

Extremely robust high pressure and single inlet centrifugal fans with sheet steel casing and impeller



CASB-X

Belt driven high pressure fans, equipped with an electric motor, a set of pulleys, belts and protectors standardized according to ISO-13857



CAAB

Extremely robust high pressure and single inlet centrifugal fans with sheet steel casing and impeller



CAST

Extremely robust open blade and single inlet centrifugal fans with sheet steel casing and impeller



CMRG

Centrifugal medium pressure and single inlet fans with backward curved impeller, hot galvanized, to work in chemical, aggressive or marine environments

SMOKE EXTRACT FANS

400 °C/2H - 300 °C/2H





SMOKE EXTRACT INSIDE FANS



THT

400 °C/2h and 300 °C/2h tubular axial extract fans with short casings



THT/CL

400 °C/2h and 300 °C/2h tubular axial extractor fans with long casing and external terminal boxes



THT/WALL

Dynamic wall mounted extractor fans with motorised hatch, for smoke exhaust in case of fires, 400 °C/2h and 300 °C/2h



THT/WALL-F

Dynamic wall mounted extractor fans with motorised hatch, for smoke exhaust in case of fires, 400 °C/2h and 300 °C/2h



THT/HATCH

400 °C/2h and 300 °C/2h rated dynamic discharge system with motorised opening function, fitted with roof mounted extractor, for smoke exhaust in the event of fire



CJTHT/PLUS

400 °C/2h and 300 °C/2h axial exhaust fan units with built-in acoustic attenuator



CJTHT

400 °C/2h and 300 °C/2h axial fans with acoustically insulated box



CJTHT/ATEX

400 °C/2h and 300 °C/2h axial exhaust units with ATEX certification



THT/IMP

400 °C/2h and 300 °C/2h long range unidirectional or reversible jet fans



TUNEL JET FAN

Jet fans specially designed for tunnel ventilation. 400 °C/2h and 300 °C/2h certificates, depending on model



CI

Long-range 300 °C/2h and 400 °C/2h centrifugal induction jet fans for use in fire risk zones with a low profile



HTMF

400 °C/2h (F400) and 300 °C/2h (F300) roof mounted multifunctional extract fans



THT/ROOF

400 °C/2h and 300 °C/2h roof mounted axial extract fans with vertical air outlets



CJBDT

Extract units with direct drive, to work inside the fire zone 400 °C/2h and 300 °C/2h



CBDT

Double suction centrifugal fans, direct motor, to work immersed in fire risk areas 400 °C/2h and 300 °C/2h



TCR

400 °C/2h and 300 °C/2h centrifugal extractor fans with backward curved impeller



CJS

400 °C/2h and 300 °C/2h extractor fan units with interchangeable covers




CJMD

400 °C/2h and 300 °C/2h extractor fan units with linear inlet and outlet

SMOKE EXTRACT FANS

400 °C/2H - 300 °C/2H

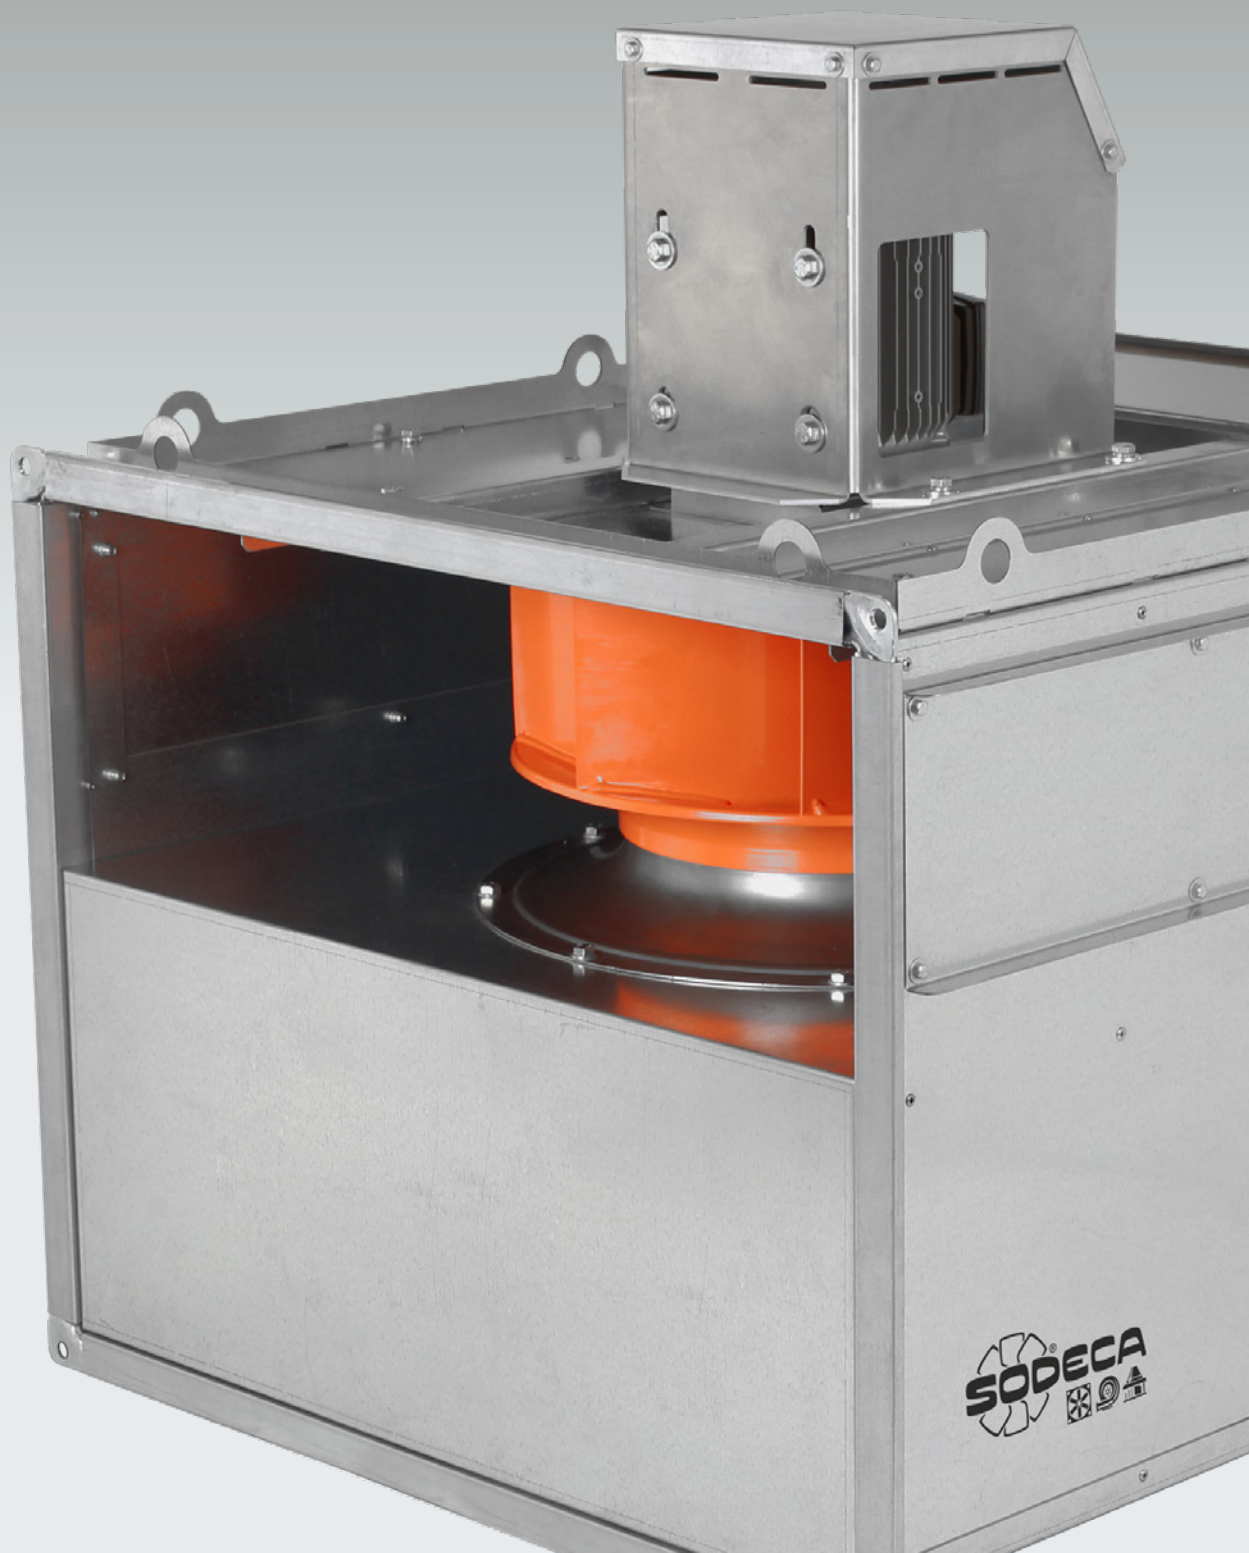



SMOKE EXTRACT OUTSIDE FANS



RFH

Centrifugal roof fans
400 °C/2h, with horizontal
air outlet, aluminum hood



RFV

400 °C/2h centrifugal roof fans
with vertical outlet air, hood in
aluminium



TCR/R

400 °C/2h centrifugal extractor
fans with backward curved
impeller



AC

TCR/R/EW

400 °C/2h centrifugal extractor
fans with backward curved
impeller fitted with electronically
adjustable, high efficiency,
asynchronous IE3 motors



CJTCR/R

400 °C/2h extractor fan units
with backward curved impeller



AC

CJTCR/R/EW

400 °C/2h extraction units
fans with backward curved
impeller fitted with electronically
adjustable, high-efficiency,
asynchronous IE3 motors



TCMP

400 °C/2h centrifugal extractor
fans with forward curved
impeller



CJMP

400 °C/2h centrifugal extractor
fan units with forward curved
impeller



CJTX-C

400°C/2h belt-driven double
inlet extractor fan units



CJSX

400 °C/2h belt-driven single
inlet extractor fan units



CJSRX

Extraction units 400 °C/2h to
work outside the fire risk zone,
driven by transmission with a
backward curved impeller



CJLINE

400°C/2h air and smoke extract
fan units with linear inlets and
outlets



EC
NEW

CJLINE/EC

Air extraction units with linear
inlet and outlet, equipped with
EC Technology IE5 motor



CKD

F400 extractor fan units
with a large door for ease
of maintenance and 40 mm
acoustic insulation slab



CKDR

F400 extractor fan units
with a large door for ease
of maintenance and 40 mm
acoustic insulation slab



EC
NEW

CKDR/EC

Extraction units with large door
and 40 mm acoustic insulation,
equipped with EC Technology
IE5 motor



CHT

Centrifugal roof fans
400 °C/2h, with horizontal
air outlet, aluminum hood



EC
NEW

CHT/EC

Centrifugal roof fans with
horizontal air outlet, with EC
Technology IE5 motor



CVT

400 °C/2h centrifugal roof fans
with vertical outlet air, hood in
aluminium



EC
NEW

CVT/EC

Centrifugal roof fans with
vertical air outlet, with EC
Technology IE5 motor

PRESSURISATION SYSTEMS FOR STAIRCASES, LOBBIES AND ESCAPE ROUTES





KIT SOBREPRESIÓN

Pressurization system for stairs or escape routes. Maintains a differential pressure of 50 Pa in a single stage, according to EN 12101-6



NEW

KIT BOXPRES PLUS

Pressurization system for stairs or escape routes. Maintains a differential pressure of 50 Pa in a single stage, according to EN 12101-6



PRESSKIT

Pressurisation equipment for lobbies, compliant with DM 30/11/1983 and the European Standard EN 12101-6



NEW

BOXPRES PLUS

Control panel for a fan



NEW

BOXPRES PLUS II

Control panel with standby fan



KIT BOXSMART

Pressurization system for stairs or escape routes. Maintains a differential pressure of 50 Pa in a single stage, according to EN 12101-6



NEW

KIT BOXSMART EC

Pressurization system for stairs or escape routes. Maintains a differential pressure of 50 Pa in a single stage, according to EN 12101-6



NEW

KIT BOXSMART FLAP

Pressurization system for stairs or escape routes. Maintains a differential pressure of 50 Pa in a single stage, according to EN 12101-6



BOXSMART

Control panel for a fan



BOXSMART II

Control panel with standby fan



KIT BOXPDS

Pressurisation equipment for staircases, escape routes and fire fighting lobbies, designed according to the European standard EN 12101-6



KIT BOXPDS II


Pressurisation equipment for staircases, escape routes and fire fighting lobbies, designed according to the European standard EN 12101-6



HATCH PDS

Equipment for pressurizing escape routes in the event of fire meeting the requirements of the European Standard EN 12101-6

EXPLOSIVE ATMOSPHERES ATEX FANS

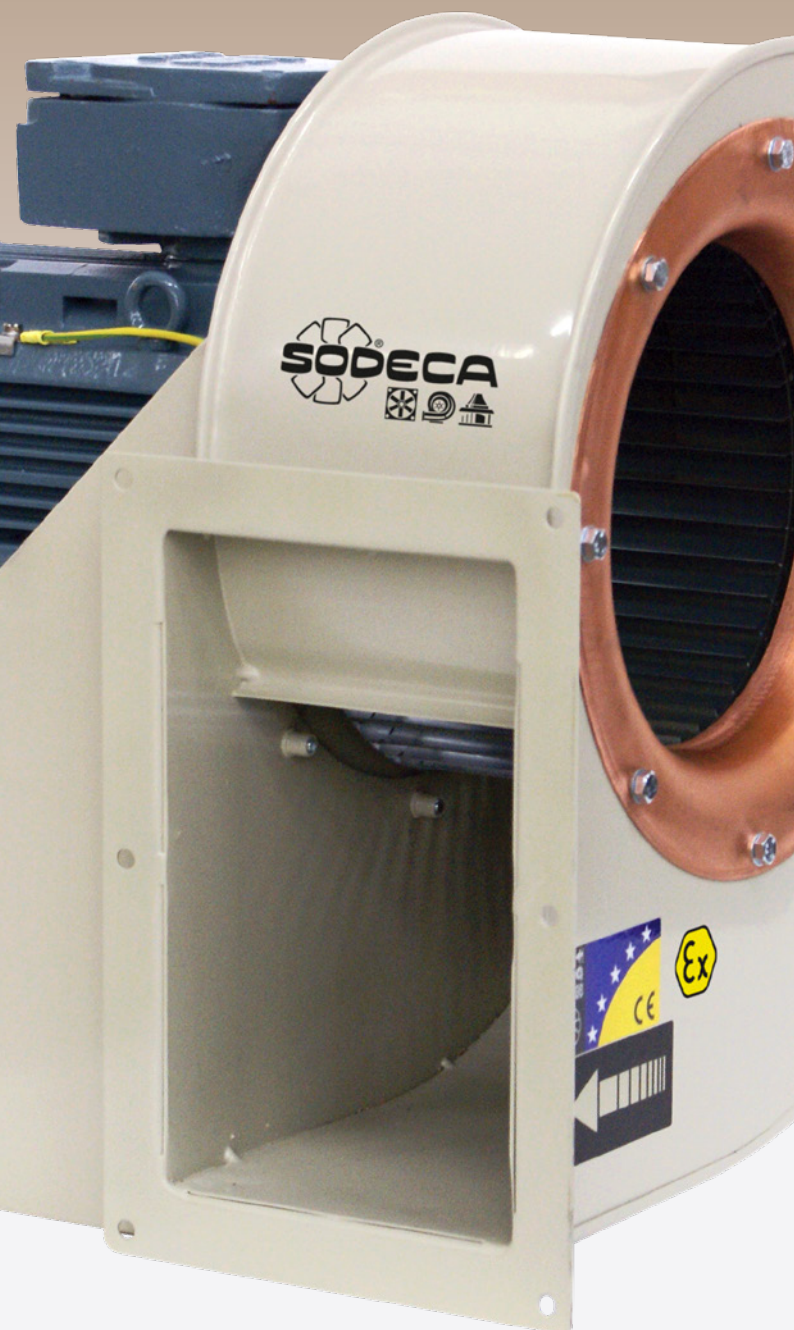

HCDF

ATEX Ex d-certified axial extractor fans with square frames




HDF

ATEX Ex d-certified axial extractor fans with circular frames



HPX/ATEX

ATEX certified tubular axial extractor fans with external motors



NEW

PF/ATEX

High efficiency Plug Fan type fans, for air treatment applications, with ATEX certification



CMR/ATEX

Extremely robust, ATEX certified centrifugal, medium pressure extractor fans fitted with a backward curved impeller



CAS/ATEX

ATEX certified high pressure single inlet centrifugal extractor fans



CHT/ATEX

Roof mounted centrifugal extractor fans with horizontal or vertical air outlet, ATEX Certification and possibility of Ex e, Ex d, Ex tc and Ex tb marking



CVT/ATEX

Roof mounted centrifugal extractor fans with horizontal or vertical air outlet, ATEX Certification and possibility of Ex e, Ex d, Ex tc and Ex tb marking



HC/ATEX

ATEX certified, wall mounted axial extractor fans and optional Ex e, Ex d, Ex tc and Ex tb marking



HCH/ATEX

Extremely robust, ATEX certified, wall mounted axial extractor fans



HCT/ATEX

Extremely robust, ATEX certified, tubular axial extractor fans



CJTHT/ATEX

400 °C/2h and 300 °C/2h axial exhaust units with ATEX certification



HTM/ATEX

ATEX certified tubular mobile extractor fans



CPV/ATEX

ATEX certified centrifugal extractor fans made of corrosion-proof plastic material



CMA/ATEX

ATEX certified medium pressure centrifugal extractor fans made of cast aluminium



CMP/ATEX

ATEX certified centrifugal, medium pressure extractor fans fitted with forward curved impeller



CMP/AL

Non-sparking aluminum fans for use in rooms with natural gas boilers



CJMP/AL

Non-sparking aluminum ventilation units for use in rooms with natural gas boilers




CA/ATEX

ATEX certified high pressure single inlet centrifugal extractor fans made of cast aluminium



HT/ATEX

ATEX certified, roof mounted axial extractor fans and optional Ex e, Ex d, Ex tc and Ex tb marking



HTMH/ATEX

Multi purpose roof mounted extractor fans for large airflow with ATEX certification and optional Ex e, Ex d, Ex tc and Ex tb marking



HTMV/ATEX

Roof mounted axial extractor fans with vertical air outlets, ATEX certification and optional Ex e, Ex d, Ex tc and Ex tb marking



RFHD

Roof mounted centrifugal extractor fans with horizontal outlets and ATEX Ex d certification

FANS FOR OVENS





SDBP/F

INOX centrifugal fans for air extraction max. 80 °C in bakery ovens and surface treatment. Horizontal air outlet



SDBP/M INOX

INOX centrifugal fans for air extraction max. 80 °C in bakery ovens and surface treatment. Vertical air outlet



SDECB/M

Centrifugal fans for air extraction max. 80 °C in bakery ovens and surface treatment. Vertical air outlet



SDECB/MGC

Centrifugal fans for air recirculation max. 300 °C, in bakery ovens and surface treatment



SDECB/O

INOX centrifugal fans for air extraction max. 80 °C in bakery ovens and surface treatment. Horizontal air outlet



SDECB/Z

Centrifugal fans for air extraction max. 300°C in bakery ovens and surface treatment. Vertical air outlet



SDLM/F

Centrifugal fans for air extraction max. 300 °C in bakery ovens and surface treatment. Horizontal air outlet



CMRH

Belt driven fans, with electric motor, pulleys, belts, guards and 150 mm thick insulation, for horizontal installation



CMSH

Medium pressure centrifugal fans, equipped with a backward curved impeller and a heat insulated box with mineral fiber



CMPH

Centrifugal medium pressure fans, equipped with a forward curved impeller and a heat insulated box with mineral fiber



HPX

Tubular axial fans with external motors



HBA

Forked tubular axial fans with motors outside the airflow

FANS FOR INDUSTRIAL APPLICATIONS



HFW

Hot dip galvanised tubular fans



HFW/EC

Hot-dip galvanized tubular axial fans, with EC Technology IE5 motor



HGTX

Large diameter tubular axial fans with external motors



HCT/MAR

Extremely robust tubular axial duct extractor fans for marine and naval applications



CASB-X

Belt driven high pressure fans, equipped with an electric motor, a set of pulleys, belts and protectors standardized according to ISO-13857



CAAB

Extremely robust high pressure and single inlet centrifugal fans with sheet steel casing and impeller



HTP

High pressure tubular axial extract fans



HBA

Forked tubular axial fans with motors outside the airflow



HPX/SEC

Fans designed to withstand extreme working conditions in ovens, dryers and other applications with high temperature and humidity



HGT

Large diameter tubular axial fans with direct drive motors



HGT/CL

Large diameter tubular axial fans with direct drive motors



HTMH

Roof mounted multifunctional extract fans for large airflows



HTMV

Roof mounted axial extract fans with vertical air outlets



CMRS

Very robust single inlet medium pressure centrifugal fans, equipped with a backward impeller



CMRS-X

Belt driven fans, equipped with an electric motor, a set of pulleys, belts and protectors standardized according to ISO-13857



CASB

Extremely robust high pressure and single inlet centrifugal fans with sheet steel casing and impeller



CAST

Extremely robust open blade and single inlet centrifugal fans with sheet steel casing and impeller



CMRH

Belt driven fans, with electric motor, pulleys, belts, guards and 150 mm thick insulation, for horizontal installation



CMRG

Centrifugal medium pressure and single inlet fans with backward curved impeller, hot galvanized, to work in chemical, aggressive or marine environments



CMP/MAR

Medium pressure centrifugal extractor fans fitted with forward curved impeller for marine applications



CMPI

Medium pressure centrifugal extractor fans fitted with forward curved impeller made of AISI-304 stainless steel

ROOF FANS



HT

Roof mounted axial extract fans with flat bases



HT/EC

Axial rooftop fans with flat base, with EC Technology IE5 motor



CRF/EW

Centrifugal rooftop fans with low noise level, equipped with EC Technology external rotor motor




CRF/EW/CPC

Centrifugal rooftop fans, automatic operation, low noise level, EC Technology motor and constant pressure control



TIRACANO

Chimney smoke extract fans



RCH

Chimney extract fan and cap for hybrid extraction in community housing



HT/ATEX

ATEX certified, roof mounted axial extractor fans and optional Ex e, Ex d, Ex tc and Ex tb marking



HTMH/ATEX

Multi purpose roof mounted extractor fans for large airflow with ATEX certification and optional Ex e, Ex d, Ex tc and Ex tb marking



HTMH

Roof mounted multifunctional extract fans for large airflows



HTMV

Roof mounted axial extract fans with vertical air outlets



HCT/HATCH

Dynamic discharge systems with motorised opening function fitted with roof-mount extract fan



HTTI

Roof mounted axial extract fans with inclined supports



CRF

Centrifugal roof fans with low noise level



CHT

Centrifugal roof fans 400 °C/2h, with horizontal air outlet, aluminum hood



CHT/EC

Centrifugal roof fans with horizontal air outlet, with EC Technology IE5 motor



CVT

400 °C/2h centrifugal roof fans with vertical outlet air, hood in aluminium



CVT/EC

Centrifugal roof fans with vertical air outlet, with EC Technology IE5 motor



CTD

Centrifugal roof mounted extract fans for household ventilation




RFH

Centrifugal roof fans 400 °C/2h, with horizontal air outlet, aluminum hood



RFV

400 °C/2h centrifugal roof fans with vertical outlet air, hood in aluminium



HTMF

400 °C/2h (F400) and 300 °C/2h (F300) roof mounted multifunctional extract fans



THT/ROOF

400 °C/2h and 300 °C/2h roof mounted axial extract fans with vertical air outlets



THT/HATCH

400 °C/2h and 300 °C/2h rated dynamic discharge system with motorised opening function, fitted with roof mounted extractor, for smoke exhaust in the event of fire



HTMV/ATEX

Roof mounted axial extractor fans with vertical air outlets, ATEX certification and optional Ex e, Ex d, Ex tc and Ex tb marking



RFHD

Roof mounted centrifugal extractor fans with horizontal outlets and ATEX Ex d certification



CHT/ATEX

Roof mounted centrifugal extractor fans with horizontal or vertical air outlet, ATEX Certification and possibility of Ex e, Ex d, Ex tc and Ex tb marking



CVT/ATEX

Roof mounted centrifugal extractor fans with horizontal or vertical air outlet, ATEX Certification and possibility of Ex e, Ex d, Ex tc and Ex tb marking

EC TECHNOLOGY AND EFFICIENT FANS



SVE/PLUS/EW

Low noise in-line duct extractor fans mounted inside a 40 mm phonoabsorbent acoustic insulated casing



CL/PLUS/EC

In-line extract fans for rectangular ducts with a 40 mm thick acoustic casing to reduce noise and EC Technology motor



HRE/EC

Circular axial fans with EC Technology outer rotor motor




HCRE/EC

Wallmounted axial fans with EC Technology external rotor motor



CJBD/EW/CPC

Acoustically isolated, self-operating exhaust units, CBD/EW fans and constant pressure control



CJBD/EW/AL

Acoustically insulated ventilation units with aluminum profiles and pre-lacquered sheet metal, with CBD/EW fans with EC Technology motor



CJV/EW

Extraction units with automatic operation, vertical air outlet, EC Technology motor and constant pressure control for homes



NEW

CPV/EC

Single inlet anti-corrosive centrifugal fans made of polypropylene, with EC Technology IE5 motor



SVE/PLUS/EW/CPC

In-line duct fans, automatic operation, low noise level and constant pressure control



NEOLINEO/EW

In-line duct extractor fans with a detachable body and small size, fitted with an EC Technology motor



HEP/EW

High efficiency wall mounted axial fans, equipped with EC Technology motor



HEPT/EW

High efficiency tubular axial fans fitted with EC Technology motors



HC/EC

Wall mounted axial fans, with EC Technology IE5 motor



HFW/EC

Hot-dip galvanized tubular axial fans, with EC Technology IE5 motor



HCT/EC

Tubular axial fans, with EC Technology IE5 motor



CBD/EW

Centrifugal double inlet fans with direct motor and high efficiency impeller, equipped with EC Technology motor



CBD/B/EW

Double inlet centrifugal fans, direct motor, forward impeller, EC Technology motor, inlet flange and without support feet



CJBD/EW

Acoustically isolated ventilation units equipped with CBD/EW fans with EC Technology motor



CJBD/EW/ALS

Acoustically insulated ventilation units with aluminum profiles and pre-lacquered sheet metal, with CBD/EW fans with EC Technology motor



CJBD/EW/ALF

Acoustically insulated ventilation units with aluminum profiles and pre-lacquered sheet metal, with CBD/EW fans with EC Technology motor



CJBD/EW/C

Acoustically isolated ventilation units equipped with CBD/EW fans with EC Technology motor



CJBD/EW/F

Acoustically isolated ventilation units equipped with CBD/EW fans with EC Technology motor



CJK/EC

Ventilation units for circular ducts, with 25 mm acoustic insulation casing, interchangeable covers and EC Technology motor



CMA/EC

Single inlet medium pressure centrifugal fans, casing and impeller in cast aluminum, and EC Technology IE5 motor



CMP/EC

Centrifugal fans of medium pressure and single inlet, direct motor, forward impeller and EC Technology IE5 motor



CRL/EC

Single inlet medium pressure centrifugal fans, backward impeller, IE5 EC Technology direct motor



CAS-L/EW

Single inlet, high pressure centrifugal fans with EC Technology motor



CKDR/EC

Extraction units with large door and 40 mm acoustic insulation, equipped with EC Technology IE5 motor

EC TECHNOLOGY AND EFFICIENT FANS



NEW

CJLINE/EC

Air extraction units with linear inlet and outlet, equipped with EC Technology IE5 motor



NEW

CHT/EC

Centrifugal roof fans with horizontal air outlet, with EC Technology IE5 motor



REB

Heat recovery units with EC Technology motor and built-in by-pass



NEW

REB-HEPA

Heat recovery units with EC Technology motor, built-in by-pass and HEPA filter



NEW



UPM/EC FE

Mobile air purifying units with high-efficiency electrostatic filters. For use in applications with greasy particles



CG

UPA

Units designed for cleaning and purifying indoor air. For use in areas of high occupancy, pharmaceutical industry and hospitals



NEW

UPC/EC PCO

Air purifying units with photocatalysis-based technology



NEW



UPC/EC FE

Air purifying units with high efficiency electrostatic filters. For use in applications with greasy particles



NEW

CVT/EC


Centrifugal roof fans with vertical air outlet, with EC Technology IE5 motor



NEW

HT/EC

Axial rooftop fans with flat base, with EC Technology IE5 motor



CRF/EW

Centrifugal rooftop fans with low noise level, equipped with EC Technology external rotor motor



CPC

CRF/EW/CPC

Centrifugal rooftop fans, automatic operation, low noise level, EC Technology motor and constant pressure control



UNIREC

High efficiency single zone heat recovery ventilators for domestic installations



NEW

RECUP/EC-H

Heat recovery units with counter flow exchanger, automatic control and EC Technology motors, for installation on deck or technical room



NEW

RECUP/EC-BS

Heat recovery units with counter flow plate exchanger, automatic control and EC Technology motors, for installation in false ceilings



PURI

Portable air purifier



CG

UPM/EC

Mobile air purifying units, designed for cleaning, odor removal and indoor air purification in any type of premises



NEW

UPM/EC PCO

Mobile air purifying units with photocatalysis-based technology



UPH/EC

Mobile air purifying units



NEW

SV/FILTER/EC

Filtration units for circular ducts and EC Technology motor



NEW

SV/HEPA/EC

HEPA filtration units for circular ducts and EC Technology motor



NEW

CJK/FILTER/EC

Air purifying units for circular ducts, 25 mm acoustic casing, EC Technology motor



CG

CG/FILTER-UVc

Air purifying units for circular ducts, with 25 mm acoustic surround for noise reduction, without fan



NEW

EC CONTROL

Automatic regulation and control panel for ventilation systems with EC Technology motors



NEW

CAP/EC

Intelligent control for the regulation of equipment with EC Technology fans prepared for external air quality probes



NEW

SI-CO2+VOC

Intelligent probe for CAP/EC control, for the regulation of ventilation based on CO2 and volatile organic compounds parameters



NEW

SI-PM2.5+VOC

Intelligent probe for CAP/EC control, for the regulation of ventilation based on the parameters of solid particles and volatile organic compounds



MTP

Brushless motor speed control 0-10 V

AIR TREATMENT UNITS



NEW

PORTABLE AIR PURIFIERS



PURI
Portable air purifier



UPM/EC
Mobile air purifying units, designed for cleaning, odor removal and indoor air purification in any type of premises



UPM/EC PCO
Mobile air purifying units with photocatalysis-based technology



UPM/EC FE
Mobile air purifying units with high-efficiency electrostatic filters. For use in applications with greasy particles




UPA
Units designed for cleaning and purifying indoor air. For use in areas of high occupancy, pharmaceutical industry and hospitals



UPH/EC
Mobile air purifying units

AIR TREATMENT UNITS

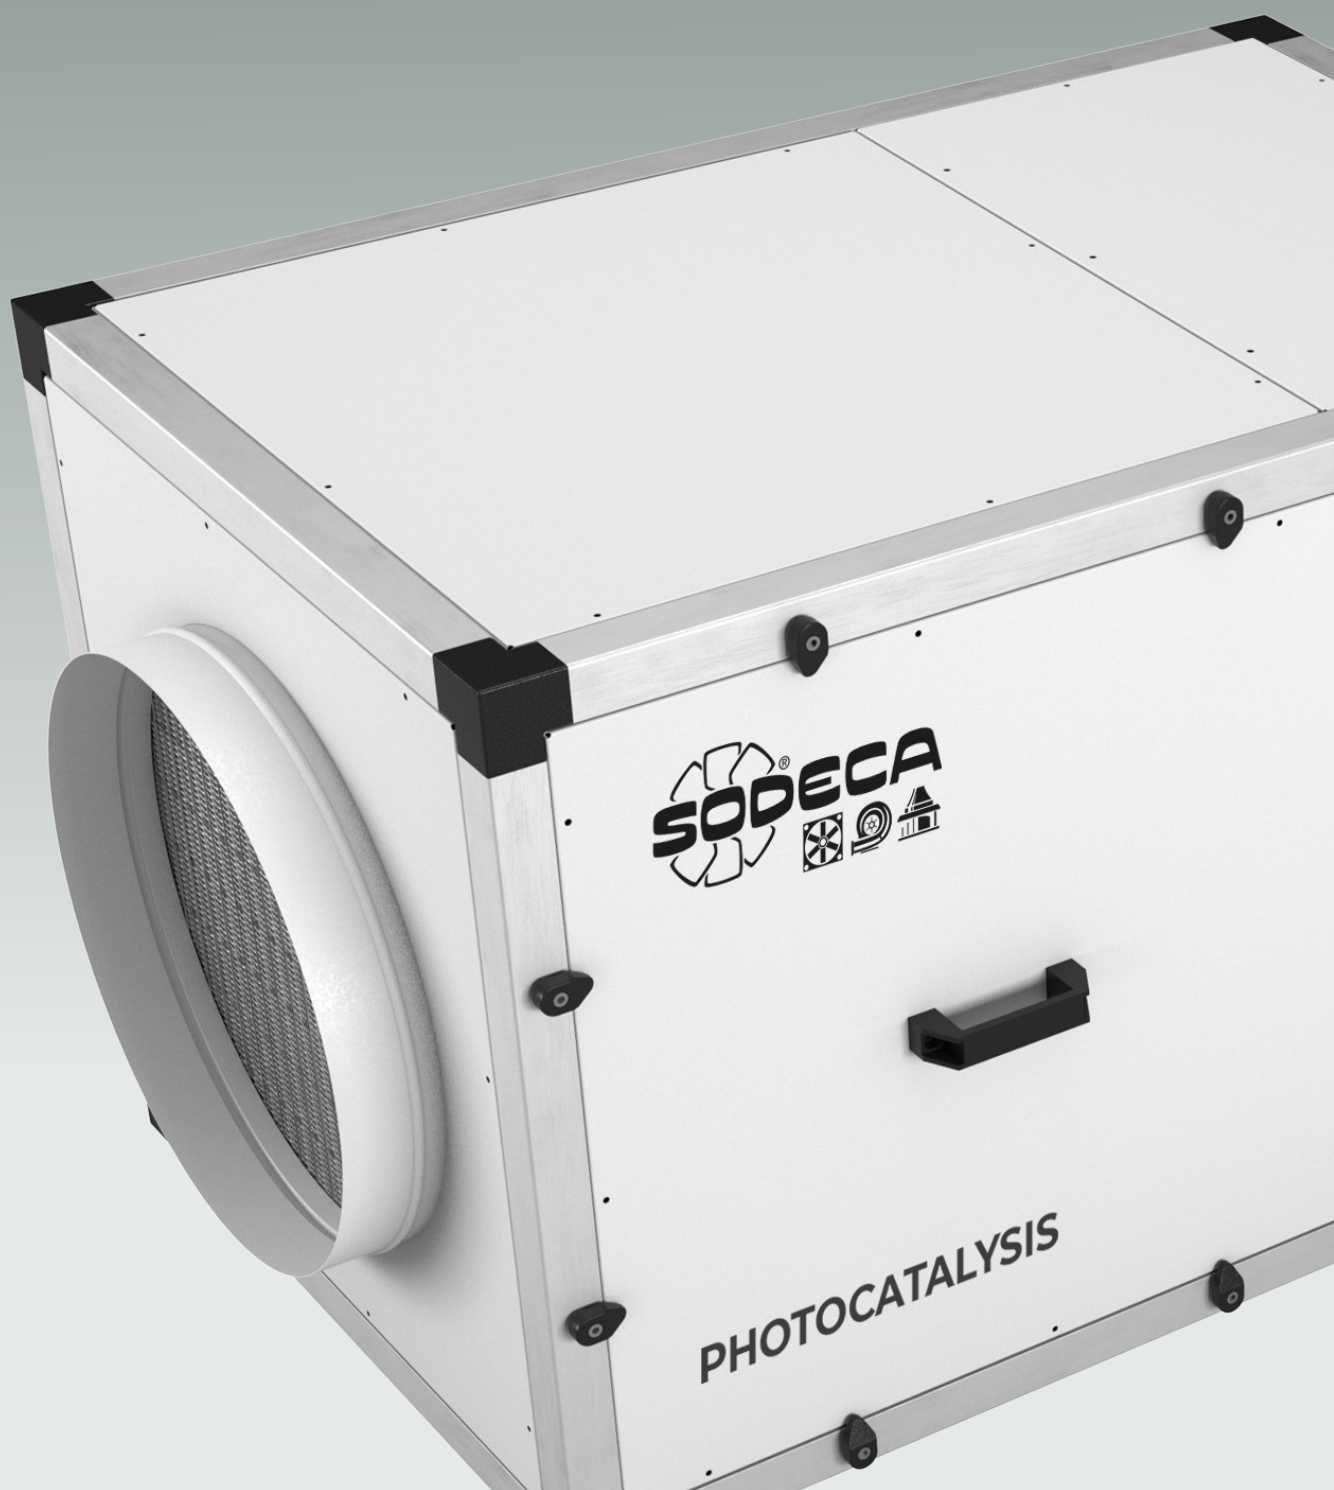

FILTRATION AND DISINFECTION UNITS

NEW



SV/FILTER

Low noise in-line duct extractors with different stages of filtration



SV/FILTER/EC

Filtration units for circular ducts and EC Technology motor



SV/HEPA/EC

HEPA filtration units for circular ducts and EC Technology motor




SV/FILTER-CG

Air purifying units with UVc germicidal chamber in line for ducts and different stages of filtration



UPT

Ceiling units for purifying and disinfecting air using HEPA H14 filtration



CJK/FILTER/EC

Air purifying units for circular ducts, 25 mm acoustic casing, EC Technology motor



CJBD/F

Ventilation units with built-in filter



CJBD/ALF

Ventilation units with pre-lacquered sheet metal, built-in filter and aluminum profiles



CJBX/F

Ventilation units with built-in filter



CJBX/ALF

Belt driven ventilation units with pre-lacquered sheet, built-in filters and aluminium profiles



UFRX/ALS PCO

Air purifying units with photocatalysis-based technology



UFRX/ALS FE

Air purifying units with high efficiency electrostatic filters. For use in applications with greasy particles



UPC/EC PCO

Air purifying units with photocatalysis-based technology



UPC/EC FE

Air purifying units with high efficiency electrostatic filters. For use in applications with greasy particles



UFR

Acoustically isolated filtration units, backward impeller fans and different filtration stages depending on the model



UFX

Acoustically isolated filtration units, equipped with double inlet fans and different filtration stages depending on the model



UFRX

Acoustically isolated filtration units, highly robust backward impeller and different filtration stages depending on the model



MF

Filter units without a fan but with various filter options



MCA


Filter units without fans, with active carbon filter cartridges



CJFILTER/REC

Filter boxes for circular and rectangular ducts, equipped with different types of filter depending on the model

AIR TREATMENT UNITS

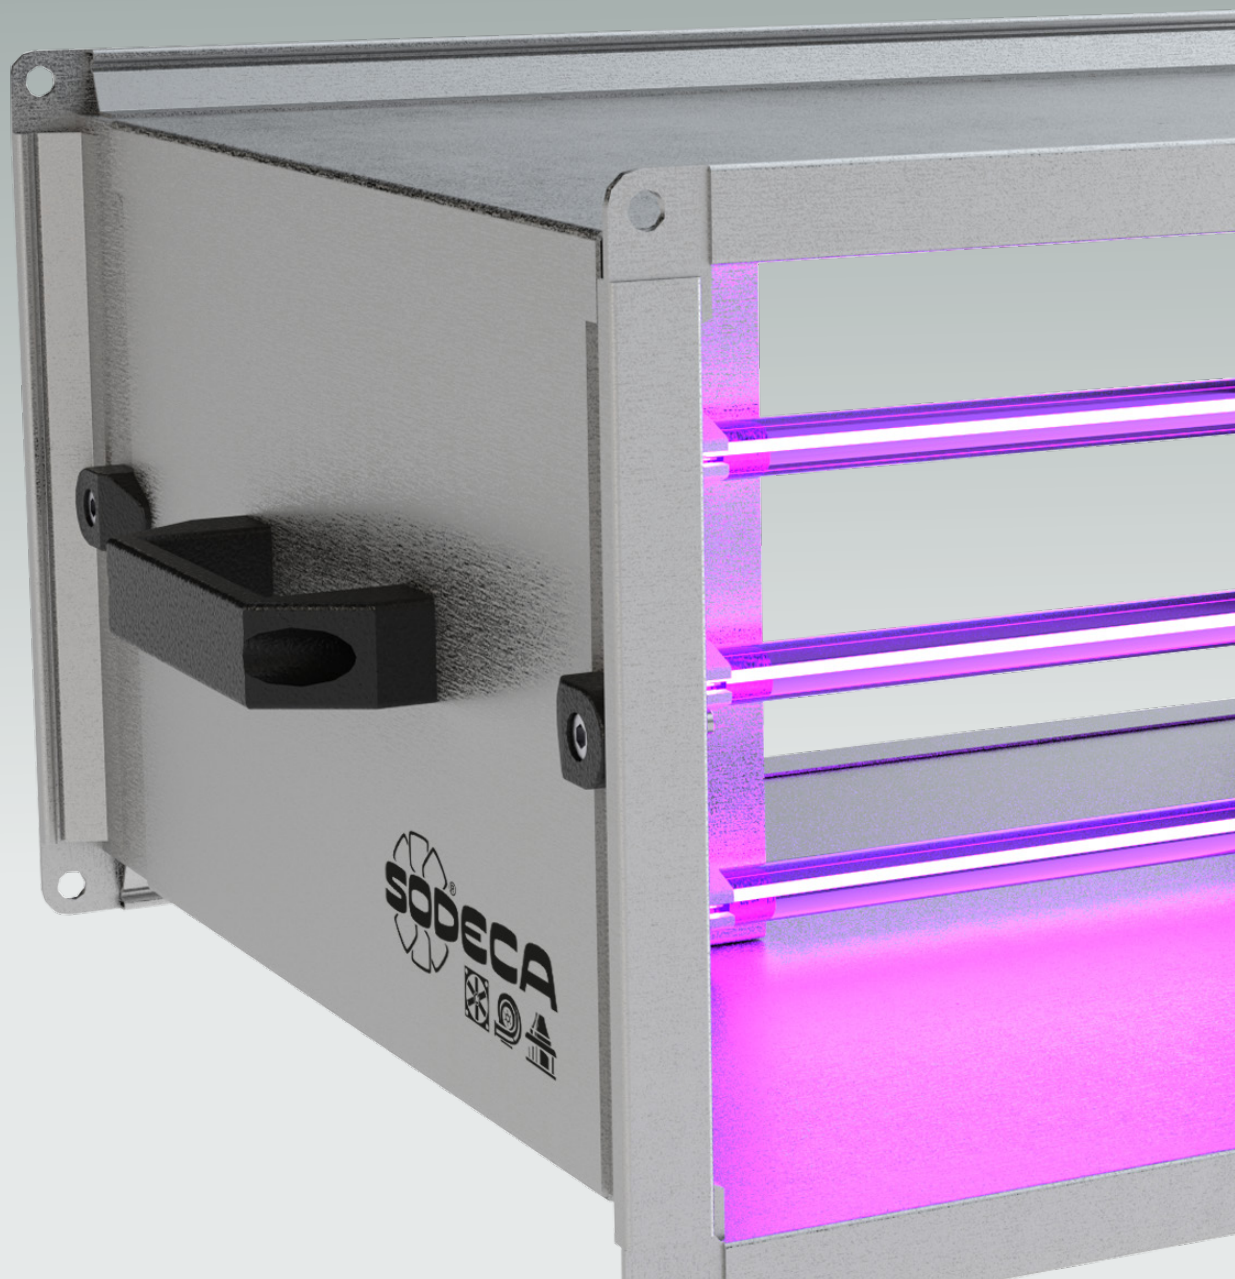

GERMICIDAL CHAMBERS

NEW



CG

CG/FILTER-UVc


Air purifying units for circular ducts, with 25 mm acoustic surround for noise reduction, without fan



CG

CG/LP-UVc


Germicidal UVc chamber without fan for circular ducts. Ideal for installation in existing HVAC and ventilation systems



CG

CGR-UVc

Germicidal UVc chamber without fan for rectangular ducts. Ideal for installation in existing HVAC and ventilation systems



NEW

MPCO


Filter units without fans, with photocatalysis technology



NEW

MFE

Filter units without fans, with high efficiency electrostatic filters

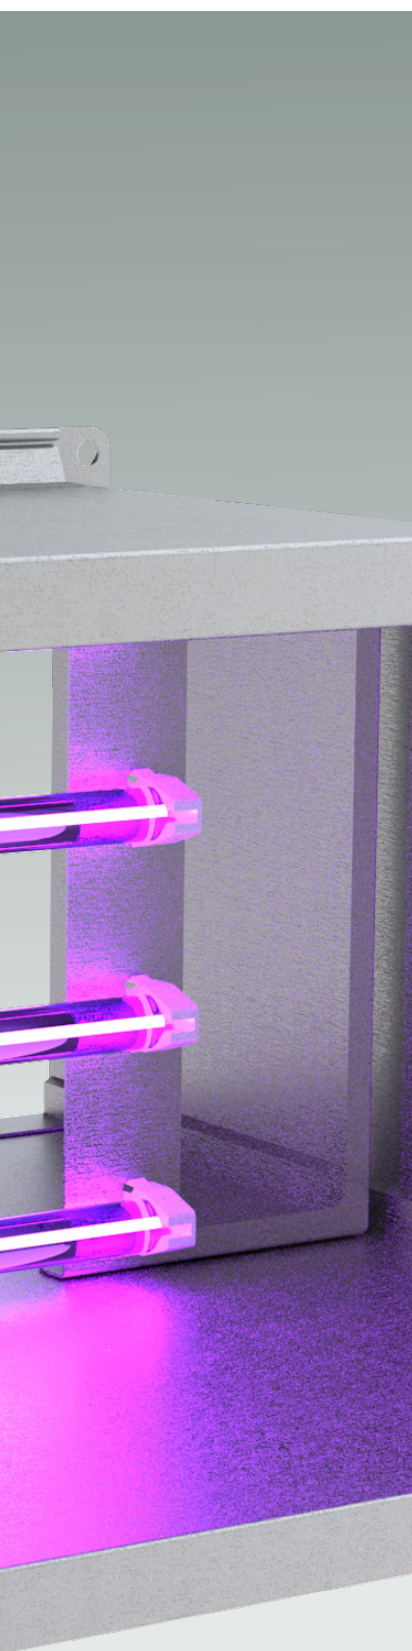

AIR TREATMENT UNITS



HEAT RECOVERY UNITS

NEW



UNIREC

High efficiency single zone heat recovery ventilators for domestic installations



VENUS

High efficiency single zone heat recovery ventilators for residential installations



REB

Heat recovery units with EC Technology motor and built-in by-pass



REB-HEPA

Heat recovery units with EC Technology motor, built-in by-pass and HEPA filter



RECUP/EC-H

Heat recovery units with counter flow exchanger, automatic control and EC Technology motors, for installation on deck or technical room



RECUP/EC-BS

Heat recovery units with counter flow plate exchanger, automatic control and EC Technology motors, for installation in false ceilings



AIR TREATMENT UNITS



MONITORING AND CONTROL

NEW



NEW

MICA-LITE/W

Air quality monitor to ensure correct ventilation in enclosed spaces



NEW

CAP/EC

Intelligent control for the regulation of equipment with EC Technology fans prepared for external air quality probes



NEW

SI-CO2+VOC

Intelligent probe for CAP/EC control, for the regulation of ventilation based on CO2 and volatile organic compounds parameters



NEW

SI-PM2.5+VOC

Intelligent probe for CAP/EC control, for the regulation of ventilation based on the parameters of solid particles and volatile organic compounds




NEW

RAC WIFI

Recessed WiFi controller for AC motors up to 300 W with connections for auxiliary equipment

VENTILATION FOR HOUSES

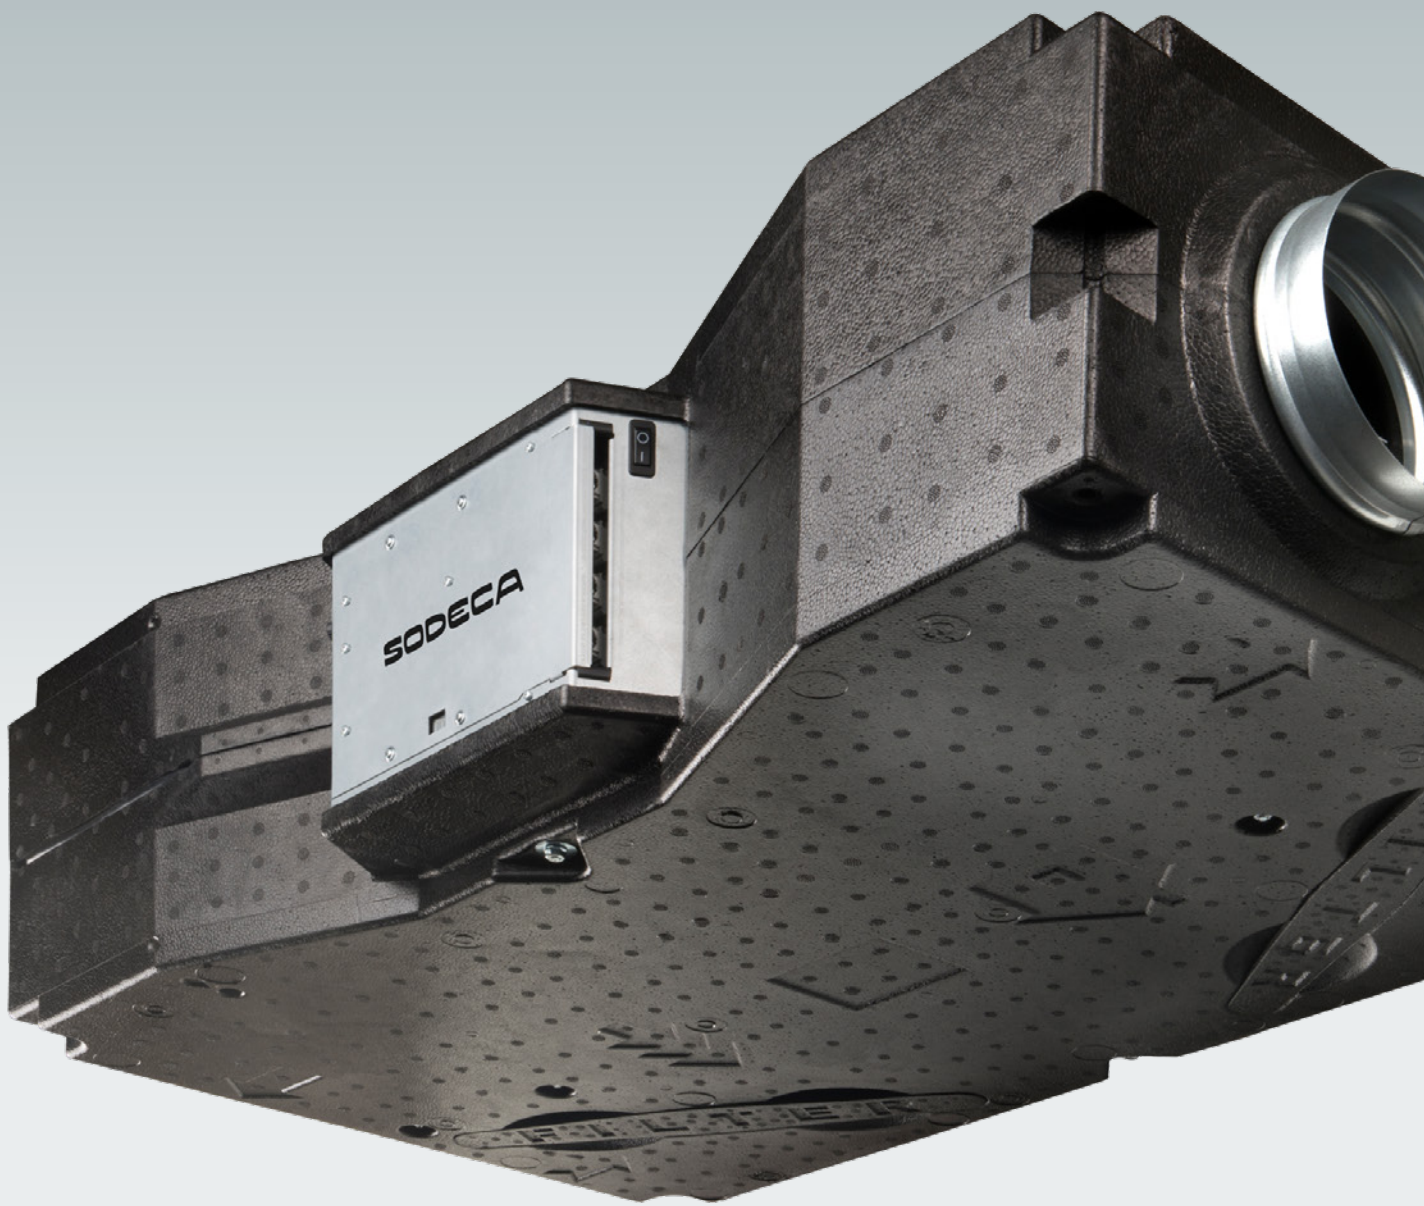



VENUS

High efficiency single zone heat recovery ventilators for residential installations



REB

Heat recovery units with EC Technology motor and built-in by-pass



REB-HEPA

Heat recovery units with EC Technology motor, built-in by-pass and HEPA filter



EVM

Compact, multi-nozzle extract fan with adjustable outlet and three speeds



EVP

Low profile extract unit, for installation in false ceilings, and extract from 3 different zones, in single-family homes or apartments



SV

Low noise, in-line duct extractor fans mounted inside an acoustic casing



SVE

Low-noise, in-line duct extractor fans mounted inside an acoustic casing



SVE/PLUS

Low noise in-line duct extractor fans mounted inside a 40 mm phonoabsorbent acoustic insulated casing



NEOLINEO V

In-line fans for small ducts with removable covers and small size with long life ball bearings



CL/PLUS/EC

In-line extract fans for rectangular ducts with a 40 mm thick acoustic casing to reduce noise and EC Technology motor



CTD

Centrifugal roof mounted extract fans for household ventilation



RCH

Chimney extract fan and cap for hybrid extraction in community housing



TIRACANO

Chimney smoke extract fans



EDMF

Extra flat bathroom extractor fans with a modern appearance and design



EDQUIET/S

Low consumption household extractor fans with very low noise levels



EDD

Household extractor fans with a modern appearance and design



CJV/EW

Extraction units with automatic operation, vertical air outlet, EC Technology motor and constant pressure control for homes



AIR CURTAINS





ECONOMIC

Economic air curtains for small commercial premises



COMERCIAL

Air curtains for commercial doors



EMPOTRABLE

Recessed air curtains for commercial doors up to 6 m high



INDUSTRIAL MODULAR

Modular construction air curtains for installation on industrial doors up to 8 m high and up to 12 m wide



HEADQUARTER

Sodeca, S.L.U.

Pol. Ind. La Barricona
Carrer del Metall, 2
E-17500 Ripoll
Girona, SPAIN
Tel. +34 93 852 91 11
Fax: +34 93 852 90 42
General sales:
comercial@sodeca.com
Export sales:
ventilation@sodeca.com

PRODUCTION PLANT

Sodeca, S.L.U.

Ctra. de Berga, km 0,7
E-08580 Sant Quirze de
Besora
Barcelona, SPAIN
Tel. +34 93 852 91 11
Fax: +34 93 852 90 42
General sales:
comercial@sodeca.com
Export sales:
ventilation@sodeca.com



EUROPE

FINLAND

Sodeca Finland, Oy

HUITTINEN
Sales and Warehouse
Mr. Kai Yli-Sipilä
Metsälinnankatu 26
FI-32700 Huittinen
Tel. + 358 400 320 125
orders.finland@sodeca.com

HELSINKI
Smoke Control Solutions
Mr. Antti Kontkanen
Viippulantie 9C
FI-00700 Helsinki
Tel. +358 400 237 434
akontkanen@sodeca.com

HYVINKÄÄ
Industrial Applications
Mr. Jaakko Tomperi
Niinistökatu 12
FI-05800 Hyvinkää
Tel. +358 451 651 333
jtomperi@sodeca.com

ITALIA

Marelli Ventilazione, S.R.L.

Viale del Lavoro, 28
37036 San Martino B.A.
(VR), ITALY
Tel. +39 045 87 80 140
vendite@sodeca.com

PORTUGAL

Sodeca Portugal, Unip. Lda.

PORTO
Rua Veloso Salgado 1120/1138
4450-801 Leça de Palmeira
Tel. +351 229 991 100
geral@sodeca.pt

LISBOA
Pq. Emp. da Granja Pav. 29
2625-607 Vialonga
Tel. +351 219 748 491
geral@sodeca.pt

ALGARVE
Rua da Alegria, 33
8200-569 Ferreiras
Tel. +351 289 092 586
geral@sodeca.pt

UNITED KINGDOM

Sodeca Fans UK, Ltd.

Mr. Mark Newcombe
Tamworth Enterprise Centre
Philip Dix House, Corporation
Street, Tamworth, B79 7DN
UNITED KINGDOM
Tel. +44 (0) 1827 216 109
sales@sodeca.co.uk

AMERICA

CHILE

Sodeca Ventiladores, SpA.

Sra. Sofía Ormazábal
Santa Bernardita 12.005
(Esquina con Puerta Sur)
Bodegas 24 a 26,
San Bernardo, Santiago, CHILE
Tel. +56 22 840 5582
ventas.chile@sodeca.com

COLOMBIA

Sodeca Latam, S.A.S.

Sra. Luisa Stella Prieto
Calle 7 No. 13 A-44
Manzana 4 Lote 1, Montana
Mosquera, Cundinamarca
Bogotá, COLOMBIA
Tel. +57 1 756 4213
ventascolombia@sodeca.co

PERU

Sodeca Perú, S.A.C.

Sr. Jose Luis Jiménez
C/ Mariscal Jose Luis de
Orbegoso 331. Urb. El pino.
15022, San Luis, Lima, PERÚ
Tel. +51 1 326 24 24
Cel. +51 994671594
comercial@sodeca.pe

RUSSIA

RUSSIA

Sodeca, L.L.C.

Mr. Stanislav Alifanov
Severnoye Shosse, 10 room 201
Business Park Plaza Ramstars
140105 Ramenskoye,
Moscow region, RUSSIA
Tel. +7 495 955 90 50
alifanov@sodeca.com



HEADQUARTER

Sodeca, S.L.U.
 Pol. Ind. La Barricona
 Carrer del Metall, 2
 E-17500 Ripoll
 Girona, SPAIN
 Tel. +34 93 852 91 11
 Fax: +34 93 852 90 42
 General sales: comercial@sodeca.com
 Export sales: ventilation@sodeca.com

PRODUCTION PLANT

Sodeca, S.L.U.
 Ctra. de Berga, km 0,7
 E-08580 Sant Quirze de Besora
 Barcelona, SPAIN
 Tel. +34 93 852 91 11
 Fax: +34 93 852 90 42
 General sales: comercial@sodeca.com
 Export sales: ventilation@sodeca.com



www.sodeca.com

